

3M™ 307EA Trizact™ Belt

Structured abrasive finishing belt



Product Construction

<i>Mineral</i>	Aluminum oxide
<i>Bonding</i>	Resin bond.
<i>Backing</i>	Very flexible JE cloth
<i>Coating</i>	Trizact
<i>Size</i>	610 mm x 50 mt

<i>Grit Range</i>	Trizact Grit Range	FEPA Grit Range
	A100	≈ P180
	A80	≈ P220
	A65	≈ P240
	A45	≈ P400
	A30	≈ P600
	A16	≈ P1200
	A6	≈ P2500

Available Forms



Applications

Materials:

High alloy steel, stainless steel, titanium, UV lacquers and polyester paint before buffing use A16 e A6

Recommendation

Designed for wet applications

3M™ 307EA Trizact™ Belt

Features

Very flexible backing

3-dimensional structured replicated pyramide-like shape.

Soft resin bond

Aluminum oxide

Advantages

Comfortable

Perfectly designed caliper, flexibility, integrated oscillation.

Programmed mineral release, low pressure belt.

Tough and sharp

Benefits


Very good surface finish, able to grind complicated shapes

Uniform and consistent finish from part to part.

Very long lasting within and tight finishing range.steps.

Perfect finish action

Machines

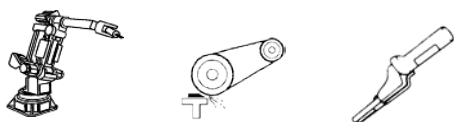

Safety



Quality

3M Plants are ISO 9002 certified.

Product Use: All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.



3M Italia SpA
Reperto ASD Abrasivi Industriali
 Via Norberto Bobbio,21
 20069 – Pioltello Milano
 Tel: 02 7035 2529
 Fax: 02 93660172

Data Sheet: 307EA
 Issued 06/11
 © 3M 2011. All rights reserved.